

KESSEL-Grease Separator "Under sink"

Illustration



Description

KESSEL-Grease Separator "Under sink"

manufactured from polymer
For free standing installation in frost free areas,
with integrated sludge trap,
polyethylene quick release odor tight covers.

Inlet and Outlet: Ø 50
Sludge trap: 7 l.
Grease trap: 7 l.
Manufacturer: KESSEL

Application

Especially suitable in areas in which limited amounts of fat and sludge occur, and above all wherever vegetable oil is used.
Grease separator system should be emptied on a daily basis.



KESSEL-advantages

- System made from polymer for corrosion-free, compact structure.
- No encrustation because of smooth, wax-like surface.
- Light handling of system because of low weight.
- Fast removal of cover using quick release odor tight covers.
- Fully adjustable inlet: 360° rotatable and vertically adjustable inlet meets all on-site requirements.

Rights reserved for technical changes

Installation	Nominal size (l/sec.)	weight emty (kg)	Article #
free standing in frost free areas	0,25	4,0	93 025.00/US

Dimensioned Drawings

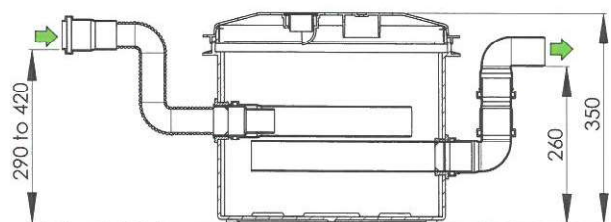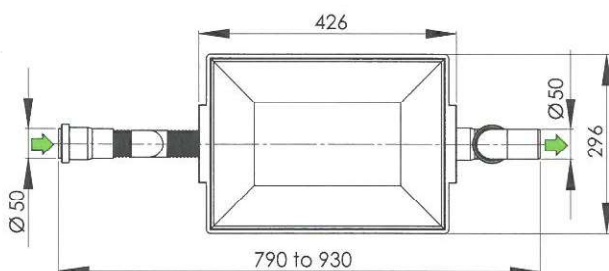

Nominal size	Ø	storage volumes	
		sludge trap	Grease trap
0,25	50	7 l	7 l

KESSEL AG
Bahnhofstraße 31
85101 Lenting
Germany
export@kessel.de
Tel. +49 8456 27-320

KESSEL
www.kessel.de